

## SURFACE TREATMENT

ALPOLIC® Brake Metal sheets are stocked with a FEVE finish, a fluorocarbon paint system that features a wide range of colors and glosses along with excellent durability and weathering for all your program needs. A PVDF, Kynar finish is also available as a custom request. Both PVDF and FEVE paints meet AMMA 2605.

## APPLICATION

ALPOLIC® Brake Metal sheets are excellent for roof caps, flashing, fascia trim, and accents. Use in conjunction with ALPOLIC® MCM panels for optimal color consistency.

## STANDARD PANEL SIZE

Standard stock sheet size is 0.032" thickness and 48"(1219mm) x 120" (3048mm). Minimum order is one (1) sheet of stocked material.

**ALPOLIC® material is trimmed and squared with cut edges to offer the best sheet edge conditions in the industry.**



## PRODUCT TOLERANCE

### .032

Width:	48 ± 0.08" (2mm)
Length:	120 ± 0.012" per ft (1mm/meter)
Thickness:	0.032 ± .00094" (without paint)
Squareness:	Maximum 0.2" (5mm)

### .040

Width:	48 ± 0.08" (2mm)
Length:	120 ± 0.012" per ft (1mm/meter)
Thickness:	0.040 ± .00094" (without paint)
Squareness:	Maximum 0.2" (5mm)

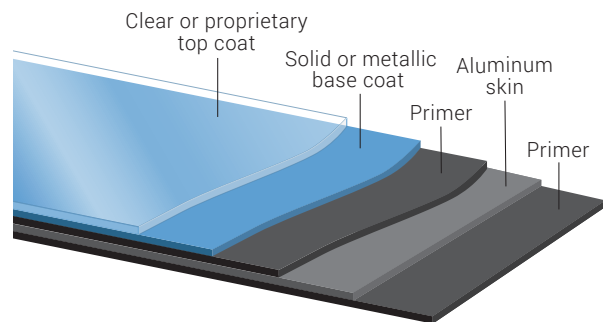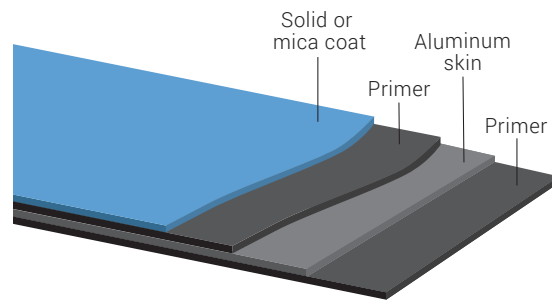

## PRODUCT NOTES

- Panels should be stored flat in a dry, indoor environment.
- Sheets are provided with a protective film.
- Protective film should be removed from sheets soon after installation.
- 1,000 square foot minimum required for custom color with an up charge.
- Custom color brake metal orders follow +/- 10% order quantity fulfillment.

## WARRANTY

*Material-only finish warranty of 10 - 35 years is available depending on the selected color. Requires a minimum bend radius of 2mm.*

*Contact ALPOLIC Customer Service for exclusions and warranty details.*

**Need Help? Contact ALPOLIC® Technical Services**

1.800.422.7270 | [technicalservices@alpolic.com](mailto:technicalservices@alpolic.com)